


Lightning strike counter



The LSC I+II lightning current meter measures and permanently saves pulse currents, together with the date and time. This ensures constant monitoring in order to notice if any lightning has struck the lightning protection system. Should this be the case, then the lightning protection system must be maintained according to VDE 0185-305 (IEC 62305).

- Saving and display of time and date
- Usable both inside and outside due to its protection class of IP 65
- Cable clip for round conductor or flat conductor
- Direct mounting on the arrester or the PE cable of the surge protection device
- Long lifespan of the internal lithium batteries
- LCD display
- Internal battery

Dimensions

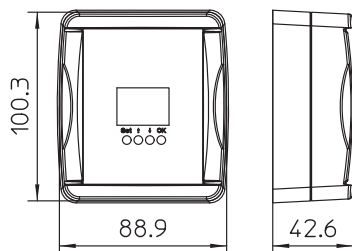

Type	Measuring range	Pack. Weight		Item No.
		pcs	kg/100 pcs.	
LSC I+II	1 kA-100 kA	1	36,000	5091722

Plastic